



## Threaded Filler Breather Caps

### Model LGB Series

- Maximum flow rate 68 CFM, 576 GPM@.18 PSI
- Steel white canister
- 3 or 10 micron phenolic resin impregnated paper
- Steel zinc plated thread adapters
- Operating temperature -22F to +212 F (-30 C to +100 C)
- Compatible with petroleum and mineral based fluids

### Options Available

- 1/2", 3/4", 1", 1 1/4" NPT threads






LGB-20-10 Assembly



LGB-12-16-10 Assembly

Missing Curve

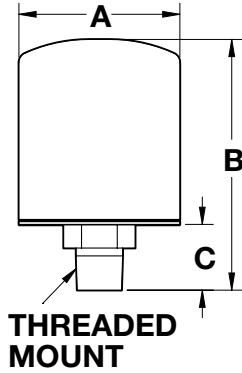

MODEL	RATED CFM	RATED GPM	TANK ADAPTOR	MOUNTING E THREAD		A	B
CP-1000	8	60	LABA-8-8	1/2" NPT	IN	1.0	1.185
				3/4"-16	MM	25.4	30
CP-752-03	15	113	LABA-8,LABA-12,LABA-16	3/4" NPT	IN	1.0	1.185
				1"-12	MM	25.4	30
CP-AB-310	40	300	LABA-12-16	3/4" NPT	IN	1.2	1.33
				1"-12	MM	30.5	34
CP-752-10	17	127	LABA-8,LABA-12,LABA-16	1/2" NPT, 3/4" NPT, 1" NPT	IN	1.5	1.085
				E=1"-12	MM	38.1	27.5
CPL-752-10	18	134	LABA-8,LABA-12,LABA-16	1/2" NPT, 3/4" NPT, 1" NPT	IN	1.5	1.085
				E=1 1/2"-16	MM	38.1	27.5
CPL-1282-03-50	58	433	LABA-20	1 1/4" NPT	IN	1.5	1.233
				E=1 1/2"-16	MM	38.1	31.3
CP-1282-10-50	54	405	LABA-20	1 1/4" NPT	IN	1.5	1.233
				E=1 1/2"-16	MM	38.1	31.3
CPL-1282-10-50	68	576	LABA-20	1 1/4" NPT	IN	1.5	1.233
				E=1 1/2"-16	MM	38.1	31.3

Air Filtration @ 99% Efficiency  
Rating @. 18 PSID

## Assembly Ordering Code

LGB - 12 - 10

SERIES	PORT	SIZE	SERIES	FILTRATION
LGB BREATHERS	8	1/2" NPT	CP-752	10 10 MICRON
	8-8	1/2" NPT	CP-1000	3 3 MICRON
	12	3/4" NPT	CP-752	10L 10 MICRON
	12-16	3/4" NPT	CP-AB-310	EXTENDED
	16	1" NPT	CP-752	
	20	1 1/4" NPT	CP-1282	

\* Check other element availability on pages 1a, 5a, 7a