



Nylon Filler Breather Caps

Model PBF, PBT Series

Specifications

- Maximum flow rate 65 CFM, 485 GPM @.58 PSI
- Nylon housing and cover
- 10 micron foam filtration
- 3 micron phenolic resin impregnated paper
- Operating temperature -22°F to +212°F (-30°C to 100°C)
- Compatible with petroleum and mineral based fluids
- Buna seals and gaskets
- Steel fill screen (PBF)
- 1 1/4" NPT threaded base (PBT)

Options Available





- Anti-splash available
- 40 micron foam
- 3 micron cellulose



PBF



PBT

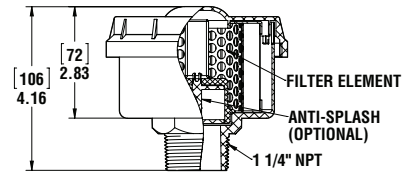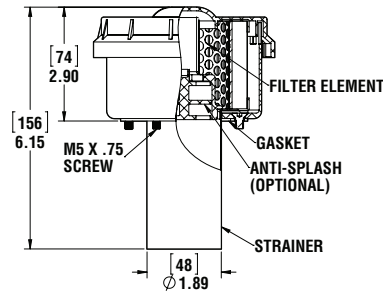

All Dimensions in mm

Ordering Code


PBF - 10 - *

Series	Media	Options
PBF	10 Micron Cellulose	Omit
PBT	40 Micron Foam	AS Anti-Splash
	10SYN 10 Micron Synthetic	
	03 Micron Cellulose	

10 Micron cellulose standard

Consult factory for optional elements availability 3

PBF,PBT Series Performance Graphs

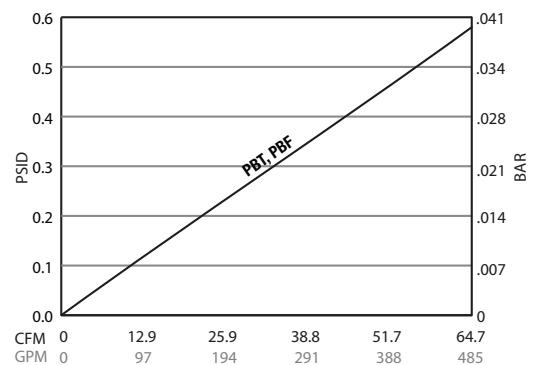

Replacement Elements

MODEL	Media
PBE-10	Cellulose
PBE-40	FOAM
PBE-10SYN	10 Micron Synthetic
PBE-03	3 Micron Cellulose