




Extended Level Gauge ELG & T-ELG

Specifications

- Transparent polycarbonate tube
- Aluminum guard can be turned 90 degrees where necessary for side viewing
- Glass reinforced nylon end caps
- Zinc plated bolts 1/2"-13 UNC standard
- Maximum 212°F (100°C) temperature
- Buna seals 70 durometer
- Graduated contrast screen
- Maximum pressure 44 PSI (3bar)
- Optional (M12 bolts) steel or stainless steel

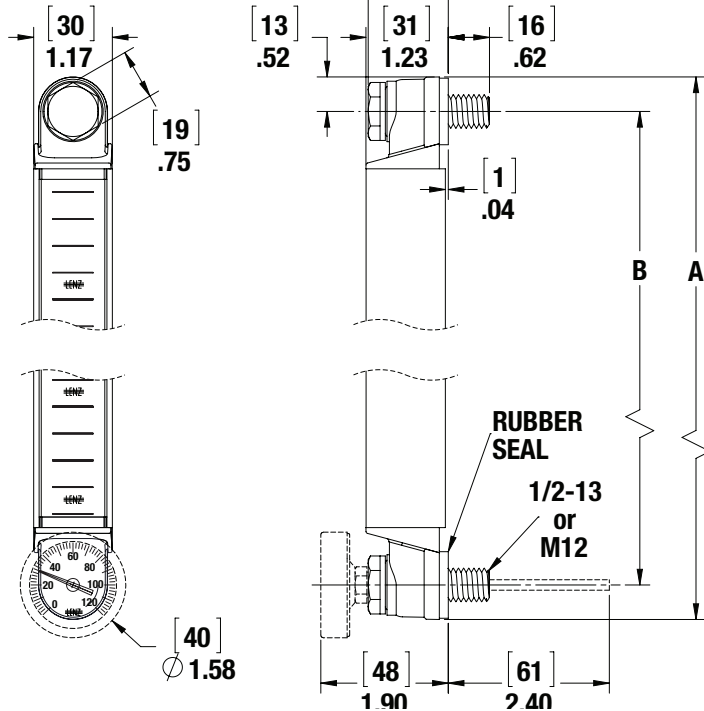

Dimensional Detail

Model		Mounting Center B	A	Wall Thickness	Mounting Hole	Mounting Bolt F	Bolt Torque
ELG-12, T-ELG-12	in.	12	13.0	0.4	.50-.53	(1/2-13)x 1.75" (M12-1.75)x 1.65"	4 FT-LBS
	mm	304.8	331	10	12.6-12.9		5 NM
ELG-15, T-ELG-15	in.	15	16.0	0.4	.50-.53		4 FT-LBS
	mm	381	407.5	10	12.6-12.9		5 NM
ELG-18, T-ELG-18	in.	18	19.0	0.4	.50-.53		4 FT-LBS
	mm	457.2	483.7	10	12.6-12.9		5 NM
ELG-24, T-ELG-24	in.	24"	25.0	0.4	.50-.53		4 FT-LBS
	mm	609.6	635.5	10	12.6-12.9		5 NM

Consult factory for custom length... Maximum length 78"

Ordering Code

T - ELG - 12 - *

Thermometer		Series	Size	Options	
Omit	Level (Only)	ELG	12	Omit	No Options
T	Temp. Gauge		15	M12	M12 Bolt
			18	V	Viton
			24	RB	Red Ball
			Specify	M12SS	303 SS Nut, Bolt

See website technical bulletin TB.TA09.708, TB.TA15.708 and for further information at (Technical Data - www.lenzinc.com).

Red Ball 6.5 mm Diameter