Tank Clean-out Covers

Model TC

LENZ has introduced a new series of tank covers, "TC Series". The tank covers include six models, ranging from a 6" to an 18" diameter. The TC Series tank covers are designed for ease of servicing hydraulic reservoirs through sidewall or through tank top.

Features Include:

- Pickled and oil steel
- Sizes 10", 12", 14", 16", 18" diameter
- Buna lip seal included with cover
- Nylon crush washer included with cover
- Torque recommendation 15ft. lbs.
- Tank baffler adapter (TC-BA) available-order separately
- Tank end cover bolts 5/8"-11 available-order separately, specify length


Options:


- Drain available-add "D" to part number (3/4" NPT Port)
- Stainless steel-add "SS" to model number (304 SS)
- EPDM gasket for fireproof Hydraulic fluids (TC-G-**-EPDM)
- TC-BR bracket can be ordered for tank w/o baffle (see website)

Model		А	В	C	D	Gasket	"L" Bolt	Access Hole
TC-10	in.	10"	8"	1.75"	7 GA.	TCG-10	1 ¹ /4"	8"
	mm	254	203	44				
TC-12	in.	12"	10"	1.75"	7 GA.	TCG-12	13/4"	10"
	mm	305	254	44				
TC-14	in.	14"	12"	1.75"	7 GA.	TCG-14	13/4"	12"
	mm	356	305	44				
TC-16	in.	16"	14"	1.75"	7 GA.	TCG-16	2"	14"
	mm	406	356	44				
TC-18	in.	18"	16"	2"	7 GA.	TCG-18	21/2"	16"
	mm	457	406	51				









Removable Bracket Mounts


Model TC BR

Bracket Mounted Access Covers (Clean out Covers) are removable and designed to be used when a baffle is unavailable to mount the cover and when access to inside of reservoir is required. This allows access into a dry (drained) reservoir for cleaning, inspection or mounting of components inside of the reservoir with full access through the opening in the reservoir.


TC-BR

Features Include:

- A removable bracket style is available
- Quick and easy installation using clips
- Carbon steel bracket .25" thickness
- Carbon steel angle clips .176" thickness

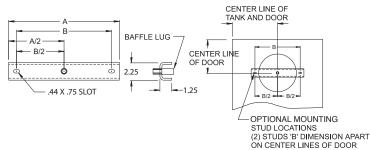


Part No.	Access Cover Dia (inches)	Access Hole Diameter (inches)	A (inches)	A/2 (inches)	B (inches)	B/2 (inches)
TC-BR-10	10	8	12.00	6.00	10.00	5.00
TC-BR-12	12	10	14.00	7.00	12.00	6.00
TC-BR-14	14	12	16.25	8.12	14.25	7.12
TC-BR-16	16	12.25	18.25	9.12	16.25	8.12
TC-BR-18	18	16	20.25	10.00	18.25	9.12



TYPICAL REMOVEABLE DOOR BRACKET INSTALLATION

Each Removable Access Cover Bracket includes:

- (1) Removable Access Cover Bracket
- *(2) Studs 3/8 inch x 3/4 inch long
- *(2) 3/8 inch hex nuts
- *(2) lockwashers



Removable endcover brackets are required when a baffle is not available to mount an endcover.

Each removable endocver bracket includes:

- 1. Removable endcover bracket
- 2. 2 each weld on clips (welded to inside of reservoir at "B"spacing)